

***ENVIRONMENTAL SYSTEMS LLC.***

***2358 HWY# 23  
MORA MN. 55051  
Ph. 320-241-7036  
7/5/2023***

***DESIGN***

**LOCATION: 46225 GRACE LAKE RD SANDSTONE MN**

**OWNER: MILLE LACS BAND OF OJIBWE**

**SYSTEM TYPE: TYPE III MOUND**

**DESIGN FLOW: 3 BEDROOM DESIGNED @ 450 GPD**

**TREATMENT AREA: 380 SQ.FT.**

**SLOPE: 10 %**

**CLEANOUTS ( 2 ) INSTALLED OUTSIDE HOME**

**SEPTIC TANK: 2250 GAL. SPLIT/COMBO**


**PUMP TANK: BROWN -WILBERT 1000 GAL.**

**PUMP: GOULDS WE 511H**

**FLOW METER: SJE RHOMBUS**

**MODEL# EZP11W6COH1JV8G10EP17A22C**

**KEVIN HERWIG M.P.C.A. 3945**

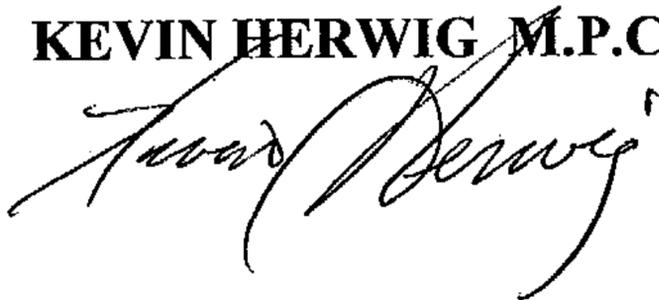

## **CONSTRUCTION NOTES**

**PRODUCT BRAND & MODEL LISTED IN DESIGN MUST BE USED. BROWN-WILBERT TANKS – SEPTIC 2250 GAL. COMBO WITH POLYLOK PL-122 FILTER AND ALARM, PUMP TANK 1000 GAL. BROWN-WIFLBERT PUMP – GOULDS WE511H \*\* PUMP CHAMBER AND PUMP SETTINGS WILL NOT BE CORRECT IF OTHER PRODUCTS ARE USED.**

**SJE RHOMBUS EZPIIW6COHIJV8GI0EP17A22C CONTROL IT IS THE DESIGNER'S DISCRETION TO APPROVE OR DISAPPROVE SUBSTITUTIONS.THE INSTALLER WILL BE RESPONSIBLE FOR DESIGN CHANGE FEE.**

**ALL PRODUCTS AND CONSTRUCTION PRACTICES ARE TO MEET M.P.C.A. 7080 RULE AND MILLE LACS BAND SPECIFICATION FOR SEWAGE TREATMENT SYSTEMS**

**KEVIN HERWIG LIC # 3945**

A handwritten signature in black ink, appearing to read "Kevin Herwig", is written over the printed name and license number.



# Preliminary Evaluation Worksheet

v 03.15.2023

## 1. Contact Information

Property Owner/Client:  Date Completed:

Site Address:  Project ID:

Email:  Phone:

Mailing Address:  Alt Phone:

Legal Description:

Parcel ID:  SEC:  TWP:  RNG:

## 2. Flow and General System Information

### A. Client-Provided Information

Project Type:  New Construction  Replacement  Expansion  Repair

Project Use:  Residential  Other Establishment:

Residential use: # Bedrooms:  Dwelling sq.ft.:  Unfinished sq.ft.:

# Adults:  # Children:  # Teenagers:

In-home business (Y/N):  If yes, describe:

Water-using devices: (check all that apply)

<input type="checkbox"/> Garbage Disposal/Grinder	<input type="checkbox"/> Dishwasher	<input type="checkbox"/> Hot Tub*
<input type="checkbox"/> Sewage pump in basement	<input type="checkbox"/> Water Softener*	<input type="checkbox"/> Sump Pump*
<input type="checkbox"/> Large Bathtub >40 gallons	<input type="checkbox"/> Iron Filter*	<input type="checkbox"/> Self-Cleaning Humidifier*
<input type="checkbox"/> Clothes Washing Machine	<input type="checkbox"/> High Eff. Furnace*	<input type="checkbox"/> Other: <input type="text"/>

\* Clear water source - should not go into system

Additional current or future uses:

Anticipated non-domestic waste:

**The above is complete & accurate:**

*Client signature & date*

### B. Designer-determined Flow and Anticipated Waste Strength Information

*Attach additional information as necessary.*

Design Flow:  GPD      Anticipated Waste Type:

Maximum Concentration    BOD:  mg/L    TSS:  mg/L    Oil & Grease:  mg/L

## 3. Preliminary Site Information

### A. Water Supply Wells

#	Description	Mn. ID#	Well Depth (ft.)	Casing Depth (ft.)	Confining Layer	STA Setback	Source
1		NA					
2							
3							
4							

Additional Well Information:

# Preliminary Evaluation Worksheet

Site within 200' of noncommunity transient well (Y/N)	<input type="text" value="No"/>	Yes, source: <input style="width: 100%;" type="text"/>
Site within a drinking water supply management area (Y/N)	<input type="text" value="No"/>	Yes, source: <input style="width: 100%;" type="text"/>
Site in Well Head Protection inner wellhead management zone (Y/N)	<input type="text" value="No"/>	Yes, source: <input style="width: 100%;" type="text"/>
Buried water supply pipes within 50 ft of proposed system (Y/N)	<input type="text" value="No"/>	
<b>B. Site located in a shoreland district/area?</b>	<input type="text" value="No"/>	Yes, name: <input style="width: 100%;" type="text" value="N/A"/>
Elevation of ordinary high water level:	<input type="text" value="N/A"/> ft	Source: <input style="width: 100%;" type="text" value="N/A"/>
Classification: <input style="width: 150px;" type="text" value="N/A"/>	Tank Setback: <input style="width: 50px;" type="text" value="N/A"/> ft.	STA Setback: <input style="width: 50px;" type="text" value="N/A"/> ft.
<b>C. Site located in a floodplain?</b>	<input type="text" value="No"/>	Yes, Type(s): <input style="width: 100%;" type="text" value="N/A"/>
Floodplain designation/elevation (10 Year):	<input type="text" value="N/A"/> ft	Source: <input style="width: 100%;" type="text" value="N/A"/>
Floodplain designation/elevation (100 Year):	<input type="text" value="N/A"/> ft	Source: <input style="width: 100%;" type="text" value="N/A"/>
<b>D. Property Line Id / Source:</b>	<input type="checkbox"/> Owner <input type="checkbox"/> Survey <input type="checkbox"/> County GIS <input type="checkbox"/> Plat Map <input type="checkbox"/> Other: <input style="width: 100%;" type="text"/>	
<b>E. ID distance of relevant setbacks on map:</b>	<input type="checkbox"/> Water <input type="checkbox"/> Easements <input type="checkbox"/> Well(s) <input type="checkbox"/> Building(s) <input type="checkbox"/> Property Lines <input type="checkbox"/> OHWL <input checked="" type="checkbox"/> Other: <input style="width: 100px;" type="text" value="450'"/>	

**4. Preliminary Soil Profile Information From Web Soil Survey (attach map & description)**

Map Units:	<input style="width: 95%;" type="text" value="NA"/>	Slope Range:	<input style="width: 95%;" type="text" value="2-45"/> %
List landforms:	<input style="width: 98%;" type="text"/>		
Landform position(s):	<input style="width: 98%;" type="text" value="Shoulder"/>		
Parent materials:	<input style="width: 98%;" type="text" value="Outwash"/>		
	Depth to Bedrock/Restrictive Feature: <input style="width: 50px;" type="text"/> in	Depth to Watertable: <input style="width: 50px;" type="text"/> in	
Map Unit Ratings	Septic Tank Absorption Field- At-grade: <input style="width: 95%;" type="text"/>		
	Septic Tank Absorption Field- Mound: <input style="width: 95%;" type="text"/>		
	Septic Tank Absorption Field- Trench: <input style="width: 95%;" type="text"/>		

**5. Local Government Unit Information**

Name of LGU:	<input style="width: 95%;" type="text" value="MILLE LACS BAND OF OJIBWE"/>
LGU Contact:	<input style="width: 95%;" type="text" value="CARLA"/>
LGU-specific setbacks:	<input style="width: 95%;" type="text"/>
LGU-specific design requirements:	<input style="width: 95%;" type="text"/>
LGU-specific installation requirements:	<input style="width: 95%;" type="text"/>

Notes:



# Field Evaluation Worksheet

v 03.15.2023

### 1. Project Information

Property Owner/Client:  Project ID:

Site Address:  Date Completed:

### 2. Utility and Structure Information

Utility Locations Identified  Gopher State One Call #   Any Private Utilities:

Locate and Verify (see Site Evaluation map)  Existing Buildings  Improvements  Easements  Setbacks

### 3. Site Information

Vegetation type(s):  Landscape position:

Percent slope:  % Slope shape:  Slope direction:

Describe the flooding or run-on potential of site:

Describe the need for Type III or Type IV system:

Note:

Proposed soil treatment area protected? (Y/N):  If yes, describe:

### 4. General Soils Information

Filled, Compacted, Disturbed areas (Y/N):

If yes, describe:

Soil observations were conducted in the proposed system location (Y/N):

A soil observation in the most limiting area of the proposed system (Y/N):

Number of soil observations:  Soil observation logs attached (Y/N):

Percolation tests performed & attached (Y/N):

### 5. Phase I. Reporting Information

	Depth		Elevation	
Limiting Condition*:	0	in	97.3	ft
Periodically saturated soil:		in		ft
Standing water:		in		ft
Bedrock:		in		ft
Benchmark Elevation:	100.0		ft	

\*Most Restrictive Depth Identified from List Below

Soil Texture:

Percolation Rate:  min/inch

Soil Hyd Loading Rate:  gpd/sq.ft

Benchmark Elevation Location:

Elevations and Benchmark on map? (Y/N):

Differences between soil survey and field evaluation:

Site evaluation issues / comments:

Anticipated construction issues:



# Soil Observation Log

Project ID: **v 03.15.2023**

Client: **MILLE LACS BAND OF OJIBWE** Location / Address: **46225 GRACE LAKE RD SANDSTONE MN**

Soil parent material(s): (Check all that apply)  Outwash  Lacustrine  Loess  Till  Alluvium  Bedrock  Organic Matter  Disturbed/Fill

Landscape Position: **Shoulder** Slope shape: **Linear, Linear** Flooding/Run-On potential: \_\_\_\_\_

Vegetation: **Lawn** Soil survey map units: **N/A** Surface Elevation-Relative to benchmark: **95.1**

Date/Time of Day/Weather Conditions: **7/5/2023 10AM** PC **PC** Limiting Layer Elevation: \_\_\_\_\_

Depth (in)	Texture	Rock Frag. %	Matrix Color(s)	Mottle Color(s)	Redox Kind(s)	Indicator(s)	Structure		Consistence
							Shape	Grade	
0-4	Loamy Fine Sand	2	7.5YR 3/2				Granular	Weak	Friable
4-12	Loamy Fine Sand	2	7.5YR 3/4				Granular	Weak	Friable
12-40	Loamy Fine Sand	2	7.5YR 4/4				Granular	Weak	Friable
40-50	Medium Loamy Sand	2	7.5YR 3/4	7.5YR 4/8	Concentrations	52	Single grain	Structureless	Loose

Observation #/Location: **1 SW** Observation Type: **Pit**

Comments:

I hereby certify that I have completed this work in accordance with all applicable ordinances, rules and laws.

**KEVIN HERWIG** (Designer/Inspector) **3945** (License #) **7/5/2023** (Date)

*[Signature]* (Signature)

Optional Verification: I hereby certify that this soil observation was verified according to Minn. R. 7082.0500 subp. 3 A. The signature below represents an infield verification of the periodically saturated soil or bedrock at the proposed soil treatment and dispersal site.

\_\_\_\_\_  
(LGU/Designer/Inspector) (Cert #) \_\_\_\_\_ (Date)



# Soil Observation Log

Project ID: **v 03.15.2023**

Client: **MILLE LACS BAND OF OJIBWE** Location / Address: **46225 GRACE LAKE RD SANDSTONE MN**

Soil parent material(s): (Check all that apply)  Outwash  Lacustrine  Loess  Till  Alluvium  Bedrock  Organic Matter  Disturbed/Fill

Landscape Position: **Shoulder** Slope %: **10.0** Slope shape: **Linear, Linear** Flooding/Run-On potential: **95.7**

Vegetation: **Lawn** Soil survey map units: **NA** Surface Elevation-Relative to benchmark: **95.7**

Date/Time of Day/Weather Conditions: **7/5/2023 10AM** OVERCAST Limiting Layer Elevation:

Depth (in)	Texture	Rock Frag. %	Matrix Color(s)	Mottle Color(s)	Redox Kind(s)	Indicator(s)	Structure		Consistence
							Shape	Grade	
0-4	Loamy Fine Sand	2	7.5YR 3/2				Granular	Weak	Friable
4-12	Loamy Fine Sand	2	7.5YR 3/4				Granular	Weak	Friable
12-40	Loamy Fine Sand	2	7.5YR 4/4				Granular	Weak	Friable
40-44	Medium Loamy Sand	2	7.5YR 3/4	7.5YR 4/8	Concentrations	S2	Single grain	Structureless	Loose

Observation #: **2** Location: **NW** Observation Type: **Auger**

Comments:

I hereby certify that I have completed this work in accordance with all applicable ordinances, rules and laws.

**KEVIN HERWIG** (Designer/Inspector) **3945** (License #) **7/5/2023** (Date)

Optional Verification: I hereby certify that this soil observation was verified according to Minn. R. 7082.0500 subp. 3 A. The signature below represents an infield verification of the periodically saturated soil or bedrock at the proposed soil treatment and dispersal site.

\_\_\_\_\_  
(LGU/Designer/Inspector) (Signature) (Cert #) (Date)



# Soil Observation Log

Project ID: V 03.15.2023

Client: **MILLE LACS BAND OF OJIBWE** Location / Address: **46225 GRACE LAKE RD SANDSTONE MN**

Soil parent material(s): (Check all that apply)  Outwash  Lacustrine  Loess  Till  Alluvium  Bedrock  Organic Matter  Disturbed/Fill

Landscape Position: **Shoulder** Slope %: **10.0** Slope shape: **Linear, Linear** Flooding/Run-On potential: \_\_\_\_\_

Vegetation: **Lawn** Soil survey map units: **N/A** Surface Elevation-Relative to benchmark: **96.8**

Date/Time of Day/Weather Conditions: **7/5/2023 10AM** PC **PC** Limiting Layer Elevation: \_\_\_\_\_

Observation #/Location: **3 NC** Observation Type: **Auger**

Depth (in)	Texture	Rock Frag. %	Matrix Color(s)	Mottle Color(s)	Redox Kind(s)	Indicator(s)	Structure		Consistence
							Shape	Grade	
0-4	Loamy Fine Sand	2	7.5YR 3/2				Granular	Weak	Friable
4-12	Loamy Fine Sand	2	7.5YR 3/4				Granular	Weak	Friable
12-40	Loamy Fine Sand	2	7.5YR 4/4				Granular	Weak	Friable

Comments:


I hereby certify that I have completed this work in accordance with all applicable ordinances, rules and laws.

**KEVIN HERWIG** *[Signature]* **3945** **7/5/2023**  
 (Designer/Inspector) (License #) (Date)

**Optional Verification:** I hereby certify that this soil observation was verified according to Minn. R. 7082.0500 subp. 3 A. The signature below represents an infield verification of the periodically saturated soil or bedrock at the proposed soil treatment and dispersal site.

\_\_\_\_\_  
 (LGU/Designer/Inspector) (Cert #) (Date)

Property Owner/Client: MILLE LACS BAND OF OJIBWE

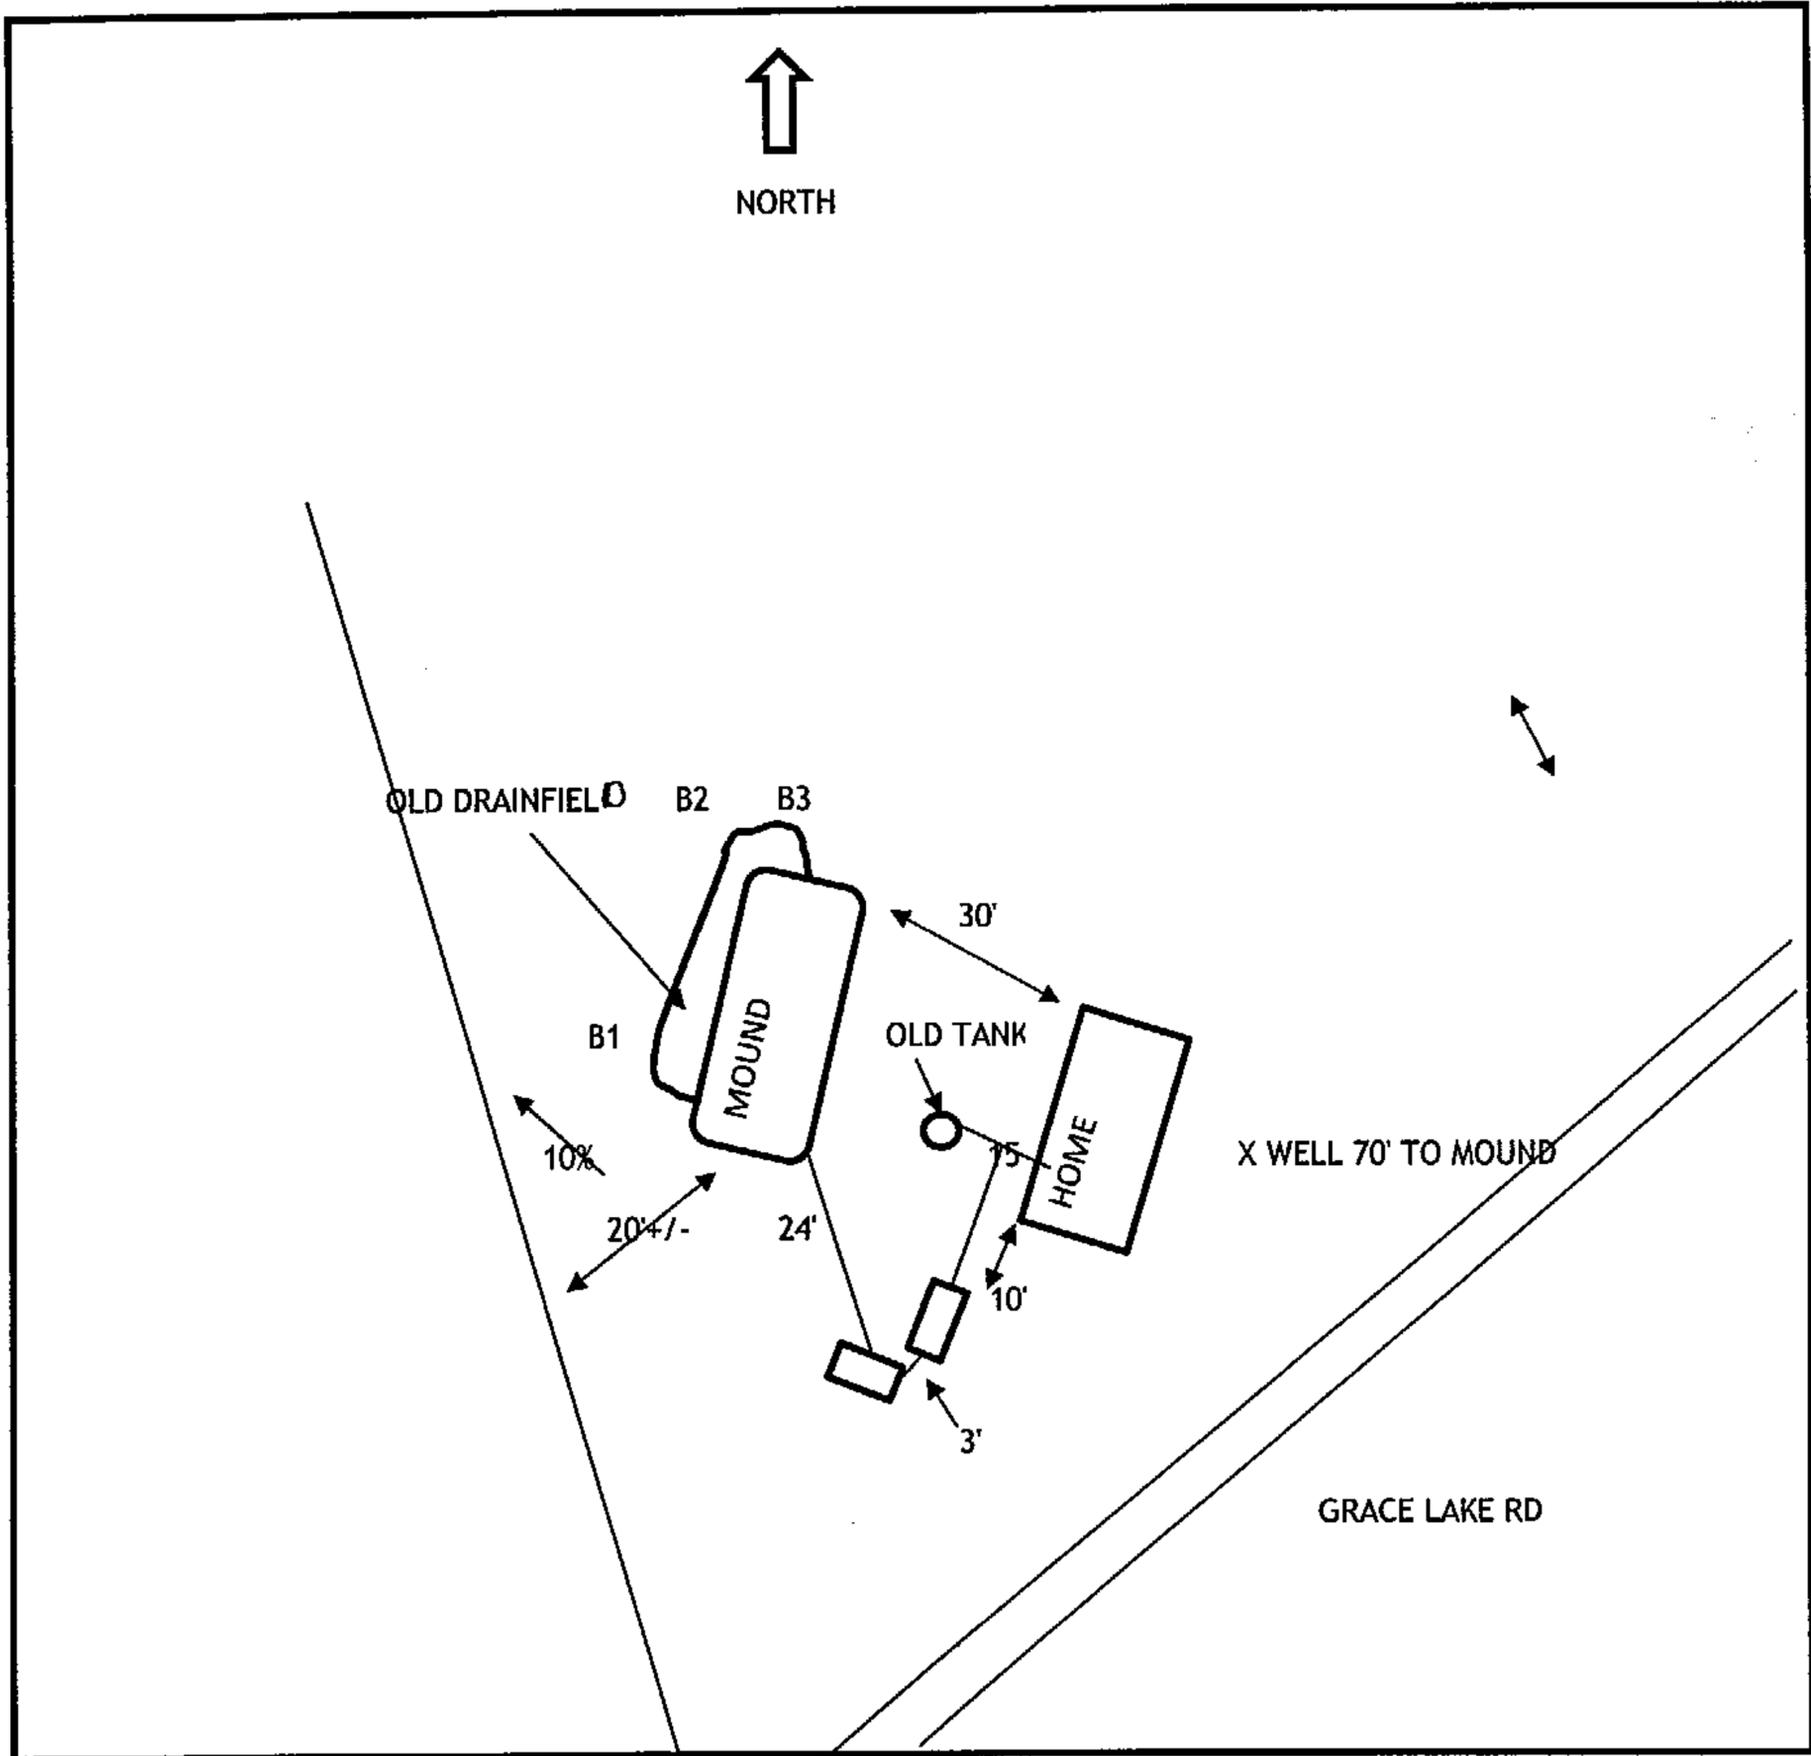

Map scale:

Indicated north

Show slope/contours

Elevations in feet

Benchmark:

ft

System Corners:

Soil Observation:

NW:	<input type="text" value="96.2"/>	ft
NE:	<input type="text" value="97.3"/>	ft
SW:	<input type="text" value="96.3"/>	ft
SE:	<input type="text" value="97.3"/>	ft

#1:	<input type="text" value="95.1"/>	ft
#2:	<input type="text" value="95.7"/>	ft
#3:	<input type="text" value="96.8"/>	ft
#4:	<input type="text"/>	ft

TANK INLET	<input type="text" value="94.35"/>	ft
Other:		
<u>PUMP TANL INLET</u>	<input type="text" value="93.85"/>	ft
	<input type="text"/>	ft

Date Completed:



v 03.15.2023

## 1. PROJECT INFORMATION

Property Owner/Client:  Project ID:

Site Address:  Date:

Email Address:  Phone:

## 2. DESIGN FLOW & WASTE STRENGTH *Attach waste strength data/estimated strength for Other Establishments*

Design Flow:  GPD Anticipated Waste Type:

BOD:  mg/L TSS:  mg/L Oil & Grease:  mg/L

Treatment Level:  *Select Treatment Level C for residential septic tank effluent*

## 3. HOLDING TANK SIZING

Minimum Capacity: Residential = 1000 gal or 400 gal/bedroom, Other Establishment = Design Flow x 5.0, Minimum size 1000 gallons

Code Minimum Holding Tank Capacity:  Gallons with  Tanks or Compartments

Recommended Holding Tank Capacity:  Gallons with  Tanks or Compartments

Type of High Level Alarm:  (Set @ 75% tank capacity)

Comments:

## 4. SEPTIC TANK SIZING

### A. Residential dwellings:

Number of Bedrooms (Residential):

Code Minimum Septic Tank Capacity:  Gallons with  Tanks or Compartments

Recommended Septic Tank Capacity:  Gallons with  Tanks or Compartments

Effluent Screen & Alarm (Y/N):  Model/Type:

### B. Other Establishments:

Waste received by:   GPD x  Days Hyd. Retention Time

Code Minimum Septic Tank Capacity:  Gallons with  Tanks or Compartments

Recommended Septic Tank Capacity:  Gallons with  Tanks or Compartments

Effluent Screen & Alarm (Y/N):  Model/Type:

\* Other Establishments Require Department of Labor and Industry Approval and Inspection for Building Sewer \*

## 5. PUMP TANK SIZING

### Soil Treatment Dosing Tank

Pump Tank Capacity (Minimum):  Gal

Pump Tank Capacity (Recommended):  Gal

Pump Req:  GPM Total Head  ft

Supply Pipe Dia.  in Dose Vol:  gal

### Other Component Dosing Tank:

Pump Tank Capacity (Minimum):  Gal

Pump Tank Capacity (Recommended):  Gal

Pump Req:  GPM Total Head  ft

Supply Pipe Dia.  in Dose Vol:  Gal

\* Flow measurement device must be incorporated for any system with a pump: Elapsed Time Meter and/or Event Counter \*



<b>6. SYSTEM AND DISTRIBUTION TYPE</b>		Project ID: _____	
Soil Treatment Type:	<input type="text" value="Mound"/>	Distribution Type:	<input type="text" value="Pressure Distribution-Level"/>
Elevation Benchmark:	<input type="text" value="100.0"/> ft	Benchmark Location:	<input type="text" value="BOTTOM OF SIDING"/>
MPCA System Type:	<input type="text" value="Type I"/>	Distribution Media:	<input type="text" value="Rock"/>
Type III/IV/V Details:	<input type="text"/>		<input type="text"/>

**7. SITE EVALUATION SUMMARY:**

Describe Limiting Condition:

Layers with >35% Rock Fragments? (yes/no)  If yes, describe below: % rock and layer thickness, amount of soil credit and any additional information for addressing the rock fragments in this design.

Note:

	Depth	Depth	Elevation of Limiting Condition	
Limiting Condition:	<input type="text" value="0"/> inches	<input type="text" value="0.0"/> ft	<input type="text" value="97.31"/> ft	<b>Critical for system compliance</b>
Minimum Req'd Separation:	<input type="text" value="36"/> inches	<input type="text" value="3.0"/> ft		Distribution Elevation >Code Max Depth
Code Max System Depth*:	<input type="text" value="Mound"/> inches	<input type="text" value="-3.0"/> ft	<input type="text" value="100.31"/> ft	Elevation OK

\*This is the maximum depth to the bottom of the distribution media for required separation. Negative Depth (ft) requires a mound.

Designed Distribution Elevation:  ft    Minimum Sand Depth:  inches

---

A. Soil Texture:     B. Organic Loading Rate (optional):  lbs/sq.ft./day    0

C. Soil Hyd. Loading Rate:  GPD/ft<sup>2</sup>    D. Percolation Rate:  MPI

E. Contour Loading Rate:     Note:

F. Measured Land Slope:  %    Note:

Comments:

**8. SOIL TREATMENT AREA DESIGN SUMMARY**

**Trench:**

Dispersal Area	<input type="text"/>	sq.ft	Sidewall Depth	<input type="text"/>	in	Trench Width	<input type="text"/>	ft
Total Lineal Feet	<input type="text"/>	ft	No. of Trenches	<input type="text"/>		Code Max. Trench Depth	<input type="text"/>	in
Contour Loading Rate	<input type="text"/>	ft	Minimum Length	<input type="text"/>	ft	Designed Trench Depth	<input type="text"/>	in

**Bed:**

Dispersal Area	<input type="text"/>	sq.ft	Sidewall Depth	<input type="text"/>	in	Maximum Bed Depth	<input type="text"/>	in
Bed Width	<input type="text"/>	ft	Bed Length	<input type="text"/>	ft	Designed Bed Depth	<input type="text"/>	in

**Mound:**

Dispersal Area	<input type="text" value="380.0"/>	sq.ft	Bed Length	<input type="text" value="38.0"/>	ft	Bed Width	<input type="text" value="10.0"/>	ft
Absorption Width	<input type="text" value="20.0"/>	ft	Clean Sand Lift	<input type="text" value="3.0"/>	ft	Berm Width (0-1%)	<input type="text"/>	ft
Upslope Berm Width	<input type="text" value="11.3"/>	ft	Downslope Berm	<input type="text" value="25.3"/>	ft	Endslope Berm Width	<input type="text" value="17.7"/>	ft
Total System Length	<input type="text" value="73.4"/>	ft	System Width	<input type="text" value="46.6"/>	ft	Contour Loading Rate	<input type="text" value="12.0"/>	gal/ft

Project ID: \_\_\_\_\_

**At-Grade:**

Dispersal Area  sq.ft      Bed Length  ft      Bed Width  ft  
 Upslope Berm  ft      Downslope Berm  ft      Finished Height  ft  
 System Length  ft      Endslope Berm  ft      System Width  ft

**Level & Equal Pressure Distribution Soil Treatment Area**

No. of Laterals       Lateral Diameter  in      Lateral Spacing  ft  
 Perforation Spacing  ft      Perforation Diameter  in      Drainback Volume  gal  
 Min Dose Volume  gal      Max Dose Volume  gal      Total Dosing Volume  gal

**Non-Level and Unequal Pressure Distribution Soil Treatment Area**

	Elevation (ft)	Pipe Size (in)	Pipe Volume (gal/ft)	Pipe Length (ft)	Perf Size (in)	Spacing (ft)	Spacing (in)	Minimum Dose Volume <input type="text"/> gal
Lateral 1								
Lateral 2								
Lateral 3								<input type="text"/> gal
Lateral 4								
Lateral 5								
Lateral 6								<input type="text"/> gal

Total Dosing Volume  gal

**9. Organic Loading and Additional Info for At-Risk, HSW or Type IV Design**

**Organic Loading to Soil Treatment**

A. Starting BOD Concentration = Design Flow X 0.7 X Starting BOD (mg/L) X 8.35 ÷ 1,000,000

gpd X  mg/L X 8.35 ÷ 1,000,000 =  lbs. BOD/day (Organic Loading Design)

B. Organic Loading to Soil Treatment Area: (enter loading value in 7B)

mg/L X  gpd X 0.7 X 8.35 ÷ 1,000,000 ÷  sq.ft =  lbs./day/sqft

**HSW Technology Strength Reduction**

A. Starting BOD Concentration = Design Flow X Starting BOD (mg/L) X 8.35 ÷ 1,000,000

gpd X  mg/L X 8.35 ÷ 1,000,000 =  lbs. BOD/day (HSW Technology Design)

B. Target BOD Concentration = Design Flow X Target BOD (mg/L) X 8.35 ÷ 1,000,000

gpd X  mg/L X 8.35 ÷ 1,000,000 =  lbs. BOD/day (HSW Technology Design)

Lbs. BOD To Be Removed:  lbs. BOD/day (HSW Technology Design)


Pretreatment Technology:  \*Must Meet or Exceed Target

Disinfection Technology:  \*Required for Levels A & B

**10. Comments/Special Design Considerations:**

I hereby certify that I have completed this work in accordance with all applicable ordinances, rules and laws.

**KEVIN HERWIG**  
(Designer)

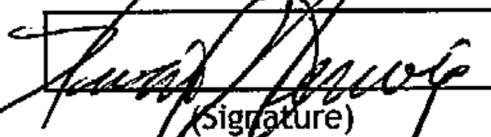  
(Signature)

**3945**  
(License #)

**7/5/2023**  
(Date)



### 1. SYSTEM SIZING:

Project ID: \_\_\_\_\_

v 03.15.2023

- A. Design Flow:  GPD
- B. Soil Loading Rate:  GPD/sqft
- C. Depth to Limiting Condition:  ft
- D. Percent Land Slope:  %
- E. Media (Sand) Loading Rate:  GPD/sqft
- F. Mound Absorption Ratio:

Measured Perc Rate	OR	Texture - derived mound absorption ratio	Contour Loading Rate:
≤ 60mpi		1.0, 1.3, 2.0, 2.4, 2.6	≤12
61-120 mpi	OR	5.0	≤12
≥ 120 mpi*		>5.0*	≤6*

Percolation Rate (MPI)	Treatment Level C		Treatment Level A, A-2, B,	
	Absorption Area Loading Rate (gpd/ft <sup>2</sup> )	Mound Absorption Ratio	Absorption Area Loading Rate (gpd/ft <sup>2</sup> )	Mound Absorption Ratio
<0.1	-	1	-	1
0.1 to 5	1.2	1	1.6	1
0.1 to 5 (fine sand and loamy fine sand)	0.6	2	1	1.6
6 to 15	0.78	1.5	1	1.6
16 to 30	0.6	2	0.78	2
31 to 45	0.6	2.4	0.78	2
46 to 60	0.45	2.6	0.6	2.6
61 to 120	-	5	0.3	5.3
>120	-	-	-	-

\*Systems with these values are not Type I systems. Contour Loading Rate (linear loading rate) is a recommended value.

### 2. DISPERSAL MEDIA SIZING

A. Hydraulic Absorption Required Bottom Area: Design Flow (1A) ÷ Design Media Loading Rate(1E)

$$\frac{450 \text{ GPD}}{1.2 \text{ GPD/sqft}} = 375 \text{ sq.ft}$$

Organic Sizing (OPTIONAL)

B. Organic Absorption Bed Area = Organic Loading (Summary 9A) ÷ Organic Soil Loading Rate (Summary 7B)

$$\text{[ ] lbs BOD} \div \text{[ ] lbs BOD/sq.ft} = \text{[ ] sq.ft}$$

C. Required Bed Area = Greater of Hydraulic (1D) or Organic Bed Area (1E)  sq.ft

D. Designed Dispersal Media Area:  sq.ft *Optional upsizing of area to be larger than 2C*

B. Enter Dispersal Bed Width:  ft *Can not exceed 10 feet*

C. Calculate Contour Loading Rate: Bed Width(2B) X Design Media Loading Rate(1E)

$$10 \text{ ft} \times 1.2 \text{ GPD/sqft} = 12.0 \text{ gal/ft} \quad \text{Can not exceed Table 1}$$

D. Calculate Minimum Dispersal Bed Length: Dispersal Bed Area(2A) ÷ Bed Width(2B)

$$\frac{380 \text{ sqft}}{10.0 \text{ ft}} = 38.0 \text{ ft}$$

If a larger dispersal media Length is desired, enter size:  ft

### 3. ABSORPTION AREA SIZING

A. Calculate Absorption Width: Bed Width(2B) X Mound Absorption Ratio(1F)

$$10.0 \text{ ft} \times 2.0 = 20.0 \text{ ft}$$

B. For slopes >1%, the Absorption Width is measured downhill from the upslope edge of the Bed.

Calculate Downslope Absorption Width: Absorption Width(1F) - Bed Width(2B)

$$20.0 \text{ ft} - 10.0 \text{ ft} = 10.0 \text{ ft}$$

**4. DISTRIBUTION MEDIA:** Project ID:

Select Dispersal Media:  Enter Either 4A or 4B

A. Rock Depth Below Distribution Pipe  
 in

B. Registered Media   
 Registered Media Depth  in *Check registered product information for specific application details and design*

Specific Media Comments:

**5. MOUND SIZING** Project ID:

A. Clean Sand Lift: Required Separation - Depth to Limiting Condition = Clean Sand Lift (1 ft minimum)  
 ft -  ft =  ft Design Sand Lift (optional):  ft

B. Upslope Height: Clean Sand Lift(6A) + Depth of Media(4AorB) +Depth to Cover Pipe+ Depth of Cover (1 ft)  
 ft +  ft +  ft +  ft =  ft

Land Slope %	0	1	2	3	4	5	6	7	8	9	10	11	12
Upslope Berm Ratio 3:1	3.00	2.91	2.83	2.75	2.68	2.61	2.54	2.48	2.42	2.36	2.31	2.26	2.21
Upslope Berm Ratio 4:1	4.00	3.85	3.70	3.57	3.45	3.33	3.23	3.12	3.03	2.94	2.86	2.78	2.70

C. Select Upslope Berm Multiplier (based on land slope):

D. Calculate Upslope Berm Width: Multiplier (5C) X Upslope Mound Height (5B)  
 X  ft =  ft

E. Calculate Drop in Elevation Under Bed: Bed Width(2B) X Land Slope(1D) ÷ 100 = Drop (ft)  
 ft X  % ÷ 100 =  ft

F. Calculate Downslope Mound Height: Upslope Height(5B) + Drop in Elevation(5E)  
 ft +  ft =  ft

Land Slope %	0	1	2	3	4	5	6	7	8	9	10	11	12
Downslope Berm Ratio 3:1	3.00	3.09	3.19	3.30	3.41	3.53	3.66	3.80	3.95	4.11	4.29	4.48	4.69
Downslope Berm Ratio 4:1	4.00	4.17	4.35	4.54	4.76	5.00	5.26	5.56	5.88	6.25	6.67	7.14	7.69

G. Select Downslope Berm Multiplier (based on land slope):

H. Calculate Downslope Berm Width: Downslope Multiplier(5G) X Downslope Height (5F)  
 x  ft =  ft

I. Calculate Minimum Berm to Cover Absorption Area: Downslope Absorption Width(3A) + 4 feet  
 ft +  ft =  ft

J. Design Downslope Berm = greater of 5H and 5I:  ft

K. Select Endslope Berm Multiplier:  (usually 3.0 or 4.0)



L. Calculate Endslope Berm Width = Endslope Berm Multiplier(5K) X Downslope Mound Height(5F)  
 X  ft =  ft

M. Calculate Mound Width: Upslope Berm Width(5D) + Bed Width(2B) + Downslope Berm Width(5J)  
 ft +  ft +  ft =  ft

N. Calculate Mound Length: Endslope Berm Width (5L) + Bed Length(2D) + Endslope Berm Width(5L)  
 ft +  ft +  ft =  ft

6. MOUND DIMENSIONS (Feet)

Project ID:

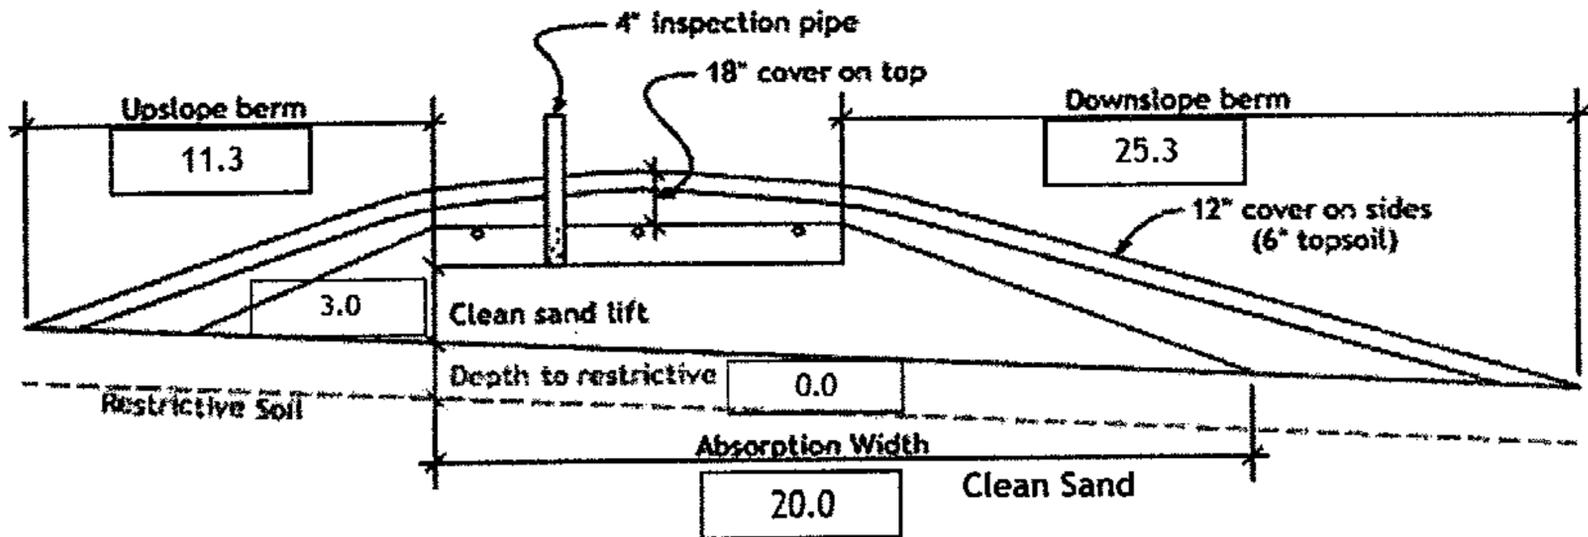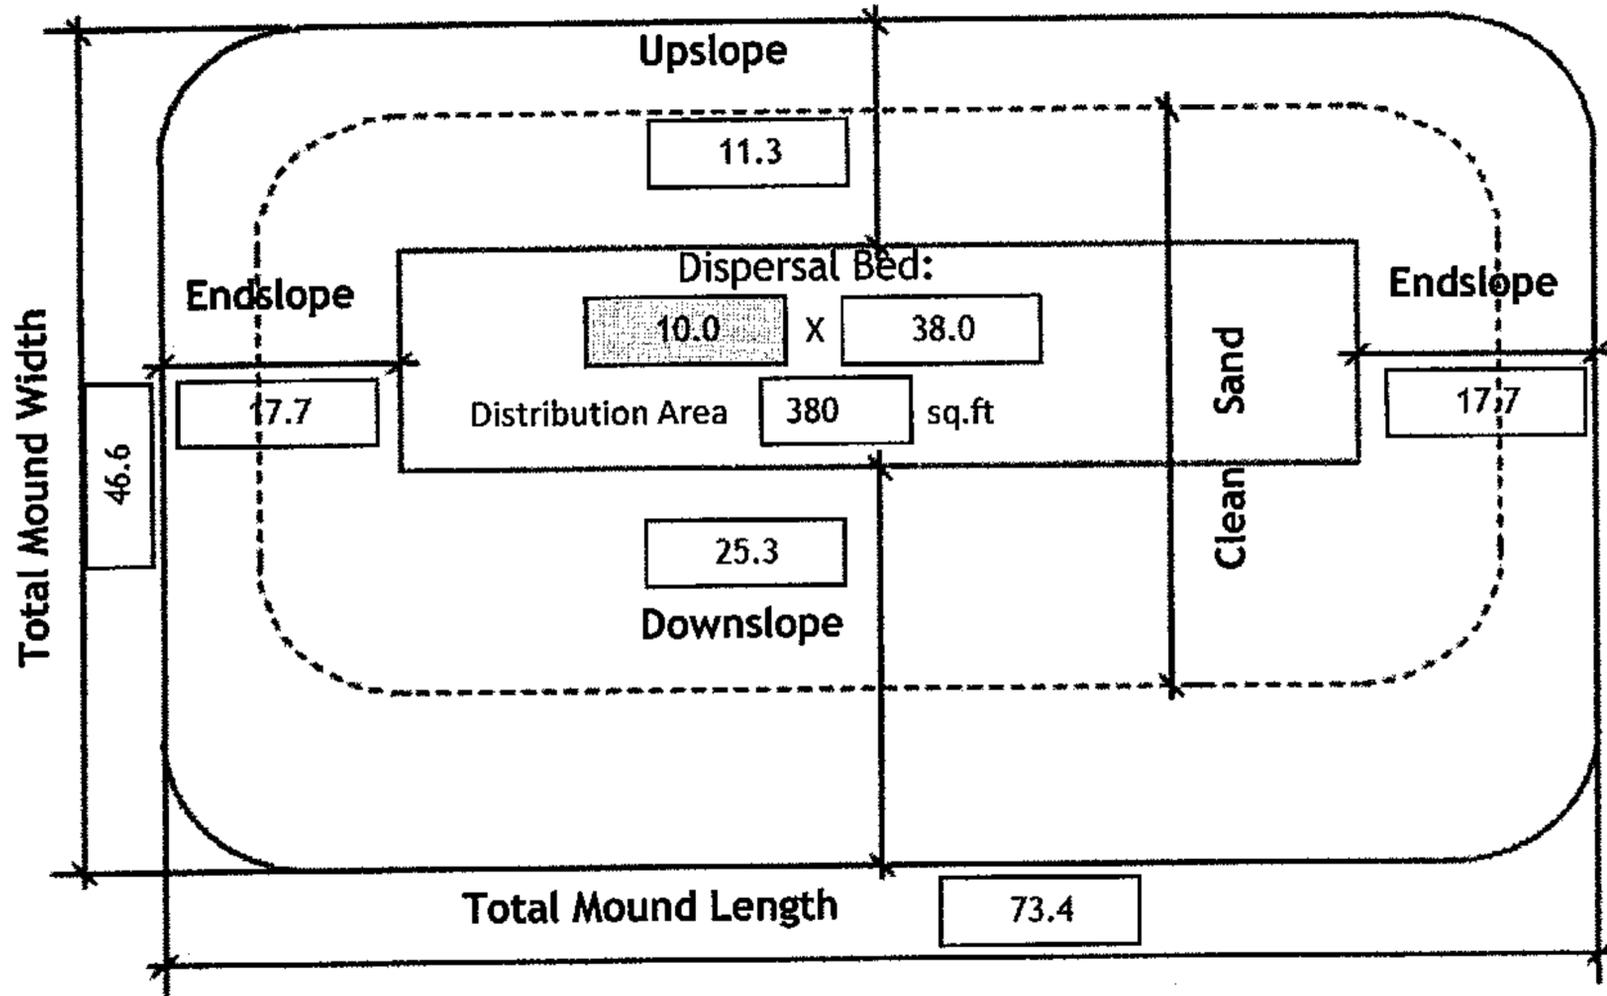

Required Separation:	<input type="text" value="36"/> (in)	Elevation to Benchmark	
Distribution Media:	<input type="text" value="Rock"/>	Elevation Limiting Layer:	<input type="text" value="97.3"/> ft
Media Depth:	<input type="text" value="6.0"/> (in)	Elevation required Separation:	<input type="text" value="100.3"/> ft
Manifold Connection:	<input type="text" value="End"/>	Elevation Distribution Media Bottom:	<input type="text" value="103.3"/> ft
Lateral Pipe Diameter:	<input type="text" value="2.00"/> (in)	Elevation Top of Media(min):	<input type="text" value="104.2"/> ft
Perforation Size:	<input type="text" value="1/4"/> (in)	Elevation Top of System(min):	<input type="text" value="105.2"/> ft
		Perforation Spacing:	<input type="text" value="36.0"/> (in)

If Split and Non-Level Pressure Distribution Used: See Non-Level Pressure Distribution Form

Comments:



# Mound Materials Worksheet

Project ID: \_\_\_\_\_ v 03.15.2023

**A. Rock Volume:** (Rock Below Pipe + Rock to cover pipe (pipe outside dia + ~2 inch)) X Bed Length X Bed Width = Volume

$$\begin{aligned}
 & \left( \boxed{6} \text{ in} + \boxed{5.0} \text{ in} \right) \div 12 \times \boxed{38.0} \text{ ft} \times \boxed{10.0} \text{ ft} = \boxed{348.3} \text{ cu.ft} \\
 & \text{Divide cu.ft by 27 cu.ft/cu.yd to calculate cubic yards: } \boxed{348.3} \text{ cu.ft} \div 27 = \boxed{12.9} \text{ cu.yd} \\
 & \text{Add 30\% for constructability: } \boxed{12.9} \text{ cu.yd} \times 1.3 = \boxed{16.8} \text{ cu.yd}
 \end{aligned}$$

**B. Calculate Clean Sand Volume:**

Volume Under Rock bed: Average Sand Depth x Media Width x Media Length = cubic feet

$$\boxed{3.5} \text{ ft} \times \boxed{10.0} \text{ ft} \times \boxed{38} \text{ ft} = \boxed{1330} \text{ cu.ft}$$

**For a Mound on a slope from 0-1%**

Volume from Length = ((Upslope Mound Height - 1) X Absorption Width Beyond Bed X Media Bed Length)

$$\boxed{\phantom{000}} \text{ ft} - 1) \times \boxed{\phantom{000}} \times \boxed{\phantom{000}} \text{ ft} = \boxed{\phantom{000}}$$

Volume from Width = ((Upslope Mound Height - 1) X Absorption Width Beyond Bed X Media Bed Width)

$$\boxed{\phantom{000}} \text{ ft} - 1) \times \boxed{\phantom{000}} \times \boxed{\phantom{000}} \text{ ft} = \boxed{\phantom{000}}$$

Total Clean Sand Volume: Volume from Length + Volume from Width + Volume Under Media

$$\boxed{\phantom{000}} \text{ cu.ft} + \boxed{\phantom{000}} \text{ cu.ft} + \boxed{\phantom{000}} \text{ cu.ft} = \boxed{\phantom{000}} \text{ cu.ft}$$

**For a Mound on a slope greater than 1%**

Upslope Volume: ((Upslope Mound Height - 1) x 3 x Bed Length) ÷ 2 = cubic feet

$$\left( \boxed{4.9} \text{ ft} - 1 \right) \times 3.0 \text{ ft} \times \boxed{38.0} \div 2 = \boxed{222.3} \text{ cu.ft}$$

Downslope Volume: ((Downslope Height - 1) x Downslope Absorption Width x Media Length) ÷ 2 = cubic feet

$$\left( \boxed{5.9} \text{ ft} - 1 \right) \times \boxed{10.0} \text{ ft} \times \boxed{38.0} \div 2 = \boxed{931.0} \text{ cu.ft}$$

Endslope Volume: (Downslope Mound Height - 1) x 3 x Media Width = cubic feet

$$\left( \boxed{5.9} \text{ ft} - 1 \right) \times 3.0 \text{ ft} \times \boxed{10.0} \text{ ft} = \boxed{147.0} \text{ cu.ft}$$

Total Clean Sand Volume: Upslope Volume + Downslope Volume + Endslope Volume + Volume Under Media

$$\boxed{222.3} \text{ cu.ft} + \boxed{931.0} \text{ cu.ft} + \boxed{147.0} \text{ cu.ft} + \boxed{1330.0} \text{ cu.ft} = \boxed{2630.3} \text{ cu.ft}$$

Divide cu.ft by 27 cu.ft/cu.yd to calculate cubic yards:  $\boxed{2630.3} \text{ cu.ft} \div 27 = \boxed{97.4} \text{ cu.yd}$

Add 30% for constructability:  $\boxed{97.4} \text{ cu.yd} \times 1.3 = \boxed{126.6} \text{ cu.yd}$

**C. Calculate Sandy Berm Volume:**

Total Berm Volume (approx.): ((Avg. Mound Height - 0.5 ft topsoil) x Mound Width x Mound Length) ÷ 2

$$\left( \boxed{5.4} - 0.5 \right) \text{ ft} \times \boxed{46.6} \text{ ft} \times \boxed{73.4} \div 2 = \boxed{8385.5} \text{ cu.ft}$$

Total Mound Volume - Clean Sand volume - Rock Volume = cubic feet

$$\boxed{8385.5} \text{ cu.ft} - \boxed{2630.3} \text{ cu.ft} - \boxed{348.3} \text{ cu.ft} = \boxed{5406.8} \text{ cu.ft}$$

Divide cu.ft by 27 cu.ft/cu.yd to calculate cubic yards:  $\boxed{5406.8} \text{ cu.ft} \div 27 = \boxed{200.3} \text{ cu.yd}$

Add 30% for constructability:  $\boxed{200.3} \text{ yd}^3 \times 1.3 = \boxed{260.3} \text{ cu.yd}$

**D. Calculate Topsoil Material Volume: Total Mound Width X Total Mound Length X .5 ft**

$$\boxed{46.6} \text{ ft} \times \boxed{73.4} \text{ ft} \times 0.5 \text{ ft} = \boxed{1711.3} \text{ cu.ft}$$

Divide cu.ft by 27 cu.ft/cu.yd to calculate cubic yards:  $\boxed{1711.3} \text{ cu.ft} \div 27 = \boxed{63.4} \text{ cu.yd}$


Add 30% for constructability:  $\boxed{63.4} \text{ cu.yd} \times 1.3 = \boxed{82.4} \text{ cu.yd}$




Project ID:

v 03.15.2023

- Media Bed Width:  ft
- Minimum Number of Laterals in system/zone = Rounded up number of  $[(\text{Media Bed Width} - 4) \div 3] + 1$ .  
 $[(\text{ }  - 4) \div 3] + 1 =$   laterals *Does not apply to at-grades*
- Designer Selected Number of Laterals:  laterals  
*Cannot be less than line 2 (Except in at-grades)*
- Select Perforation Spacing:  ft
- Select Perforation Diameter Size:  in
- Length of Laterals = Media Bed Length(1.) - 2 Feet.  
 - 2ft =  ft *Perforation can not be closer than 1 foot from edge.*
- Determine the Number of Perforation Spaces. Divide the Length of Laterals(6.) by the Perforation Spacing (4.) and round down to the nearest whole number.  
*Number of Perforation Spaces =*  ft  $\div$   ft =  Spaces
- Number of Perforations per Lateral is equal to 1.0 plus the Number of Perforation Spaces(7.). Check table below to verify the number of perforations per lateral guarantees less than a 10% discharge variation. The value is double with a center manifold.  
*Perforations Per Lateral =*  Spaces + 1 =  Perfs. Per Lateral

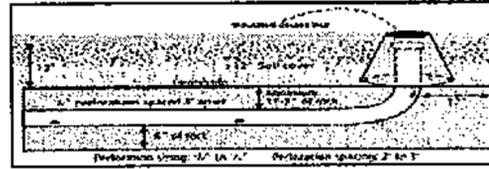


Maximum Number of Perforations Per Lateral to Guarantee <10% Discharge Variation											
1/4 Inch Perforations						7/32 Inch Perforations					
Perforation Spacing (Feet)	Pipe Diameter (Inches)					Perforation Spacing (Feet)	Pipe Diameter (Inches)				
	1	1 1/4	1 1/2	2	3		1	1 1/4	1 1/2	2	3
2	10	13	18	30	60	2	11	16	21	34	68
2 1/2	8	12	16	28	54	2 1/2	10	14	20	32	64
3	8	12	16	25	52	3	9	14	19	30	60
3/16 Inch Perforations						1/8 Inch Perforations					
Perforation Spacing (Feet)	Pipe Diameter (Inches)					Perforation Spacing (Feet)	Pipe Diameter (Inches)				
	1	1 1/4	1 1/2	2	3		1	1 1/4	1 1/2	2	3
2	12	18	26	46	87	2	21	33	44	74	149
2 1/2	12	17	24	40	80	2 1/2	20	30	41	69	135
3	12	16	22	37	75	3	20	29	38	64	128

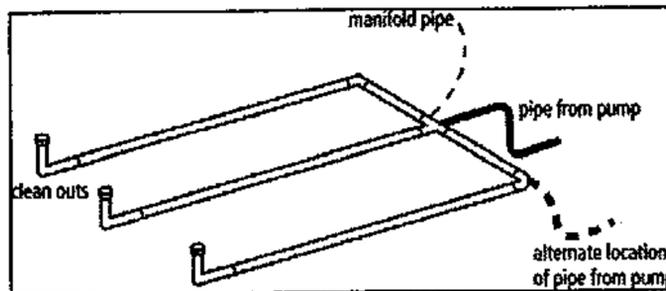

END Connection

Perf Per Lateral: 13

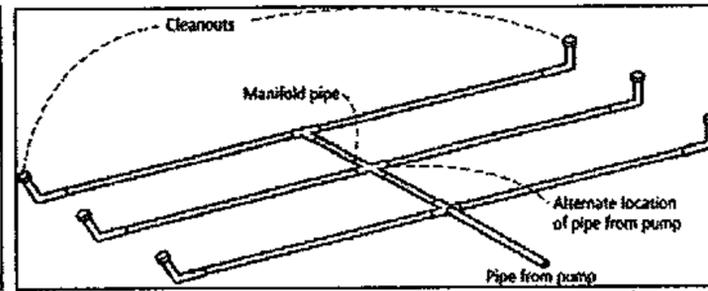

CENTER Connection

Perf Per Lateral Equal Split: 7 | 6

OPTIONAL Perf Per Lateral Non-Equal Split\*:        |       

\* must not exceed maximum number perfs per lateral in table

- Total Number of Perforations equals the Number of Perforations per Lateral (8.) multiplied by the Number of Perforated Laterals.(3.)  
 Perf. Per Lat. X  Number of Perf. Lat. =  Total Number of Perf.
- Spacing of laterals; Must be greater than 1 foot and no more than 3 feet:  ft
- Select Type of Manifold Connection (End or Center):  *If Center Manifold Connection the max number of perfs per lateral in the table can be doubled.*
- Select Lateral Diameter (See Table):  in



13. Calculate the *Square Feet per Perforation*.

*Recommended value is 4-11 ft<sup>2</sup> per perforation, Does not apply to At-Grades*

a. *Bed Area* = Bed Width (ft) X Bed Length (ft)

10 ft X 38 ft = 380 sq.ft

b. *Square Foot per Perforation* = Bed Area ÷ by the Total Number of Perfs

380 sqft ÷ 39 perf = 9.7 sq.ft/perf

14. Select *Minimum Average Head*:

1.0 ft

15. Select *Perforation Discharge* based on Table:

0.74 GPM per Perf

16. *Flow Rate* = Total Number of Perfs(9.) X *Perforation Discharge*(15.)

39 Perfs X 0.74 GPM per Perforation = 29 GPM

17. *Volume of Liquid Per Foot of Distribution Piping* (Table II):

0.170 Gallons/ft

18. *Volume of Distribution Piping* = Number of Perforated Laterals(3.) X Length of Laterals(6.) X *Volume of Liquid Per Foot of Distribution Piping* (17.)

3 X 36 ft X 0.170 gal/ft = 18.4 Gallons

19. *Minimum Delivered Volume* = *Volume of Distribution Piping* X 4

18.4 gals X 4 = 73.4 Gallons

20. *Maximum Delivered Volume* = Design flow x 25%

450.0 gpd X 25% = 112.5 Gallons

21. *Minimum Delivered vs Maximum Delivered* evaluation:

Volume ratio correct

Perforation Discharge (GPM)				
Head (ft)	Perforation Diameter			
	1/4	3/16	7/32	1/2
1.0'	0.18	0.41	0.54	0.74
1.5	0.22	0.51	0.69	0.9
2.0'	0.26	0.59	0.80	1.04
2.5	0.29	0.65	0.89	1.17
3.0	0.32	0.72	0.98	1.28
4.0	0.37	0.83	1.13	1.47
5.0'	0.41	0.93	1.26	1.69
1 foot	Dwellings with 3/16 inch to 1/4 inch perforations			
2 feet	Dwellings with 1/8 inch perforations Other establishments and MSTS with 3/16 inch to 1/4 inch perforations			
3 feet	Other establishments and MSTS with 1/8 inch perforations			

Pipe Diameter (inches)	Liquid Per Foot (Gallons)
1	0.045
1.25	0.078
1.5	0.110
2	0.170
3	0.380
4	0.661

Comments/Special Design Considerations:

1. PUMP CAPACITY Project ID: \_\_\_\_\_ v 03.15.2023

Pumping to Gravity or Pressure Distribution:

A. If pumping to gravity enter the gallon per minute of the pump:  GPM (10 - 45 gpm)

B. If pumping to a pressurized distribution system:  GPM

C. Enter pump description:


2. HEAD REQUIREMENTS

A. Elevation Difference  ft between pump and point of discharge:

B. Distribution Head Loss:  ft

C. Additional Head Loss\*:  ft (due to special equipment, etc.)

\* Common additional head loss: gate valve = 1 ft each, globe valve = 1.5 ft each, splitter valve = see manufacturers details

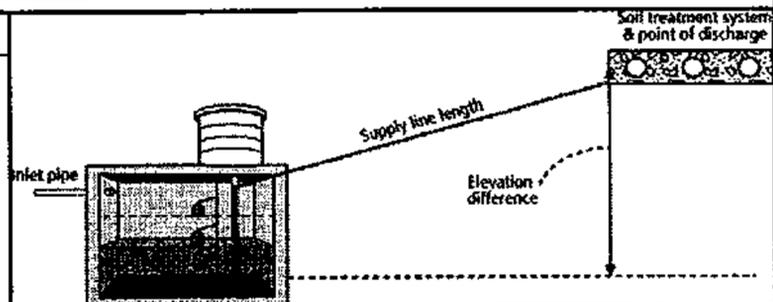

Distribution Head Loss	
Gravity Distribution = 0ft	
Pressure Distribution based on Minimum Average Head Value on Pressure Distribution Worksheet:	
Minimum Average Head	Distribution Head Loss
1ft	5ft
2ft	6ft
5ft	10ft

Table I. Friction Loss in Plastic Pipe per 100ft

Flow Rate (GPM)	Pipe Diameter (inches)			
	1	1.25	1.5	2
10	9.1	3.1	1.3	0.3
12	12.8	4.3	1.8	0.4
14	17.0	5.7	2.4	0.6
16	21.8	7.3	3.0	0.7
18		9.1	3.8	0.9
20		11.1	4.6	1.1
25		16.8	6.9	1.7
30		23.5	9.7	2.4
35			12.9	3.2
40			16.5	4.1
45			20.5	5.0
50				6.1
55				7.3
60				8.6
65				10.0
70				11.4
75				13.0
85				16.4
95				20.1

D. 1. Supply Pipe Diameter:  in

2. Supply Pipe Length:  ft

E. Friction Loss in Plastic Pipe per 100ft from Table I:

Friction Loss =  ft per 100ft of pipe

F. Determine Equivalent Pipe Length from pump discharge to soil dispersal area discharge point. Estimate by adding 25% to supply pipe length for fitting loss.  
 Supply Pipe Length X 1.25 = Equivalent Pipe Length

ft X 1.25 =  ft

G. Calculate Supply Friction Loss by multiplying Friction Loss Per 100ft(E.) by the Equivalent Pipe Length(F.) and divide by 100.

Supply Friction Loss =  ft per 100ft X  ft ÷ 100 =  ft

H. Total Head requirement is the sum of the Elevation Difference(2A) + Distribution Head Loss(2B) + Additional Head Loss(2C) + Supply Friction Loss(2G)

ft +  ft +  ft +  ft =  ft

3. PUMP SELECTION

A pump must be selected to deliver at least **29.0** GPM with at least **17.7** feet of total head.

Comments:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

DETERMINE TANK CAPACITY AND DIMENSIONS Project ID: v 03.15.2023

1. A. Design Flow (Design Sum. 1A): 450 GPD C. Tank Use: Dosing

B. Min. required pump tank capacity: 500 Gal D. Recommended pump tank capacity: 1000 Gal

2. A. Tank Manufacturer: BROWN WILBERT B. Tank Model: 1000

C. Capacity from manufacturer: 1089 Gallons

D. Gallons per inch from manufacturer: 22.0 Gallons per inch

E. Liquid depth of tank from manufacturer: 48.0 inches

*Note: Design calculations are based on this specific tank. Substituting a different tank model will change the pump float or timer settings. Contact designer if changes are necessary.*

DETERMINE DOSING VOLUME

3. Calculate Volume to Cover Pump (The inlet of the pump must be at least 4-inches from the bottom of the pump tank & 2 inches of water covering the pump is recommended)

(Pump and block height + 2 inches) X Gallons Per Inch (2D)

(14 in + 2 inches) X 22.7 Gallons Per Inch = 363 Gallons

4. Minimum Delivered Volume = 4 X Volume of Distribution Piping:  
-Item 19 of the Pressure Distribution STA or Item 11 of Non-level STA 73 Gallons (Minimum dose) 3.2 inches/dose

5. Calculate Maximum Pumpout Volume (25% of Design Flow(1A))  
Design Flow: 450 GPD X 0.25 = 113 Gallons (Maximum dose) 5.0 inches/dose

6. Select a pumpout volume that meets both Minimum and Maximum: 112 Gallons

7. Calculate Doses Per Day = Design Flow(1A) ÷ Delivered Volume(6.)  
450 gpd ÷ 112 gal = 4.02 Doses\*

\* Doses need to be equal to or greater than 4

8. Calculate Drainback:

A. Diameter of Supply Pipe = 2 inches

B. Length of Supply Pipe = 24 feet

C. Volume of Liquid Per Lineal Foot of Pipe = 0.170 Gallons/ft

D. Drainback = Length of Supply Pipe(8B) X Volume of Liquid Per Lineal Foot of Pipe(8C)  
24 ft X 0.170 gal/ft = 4.1 Gallons

9. Total Dosing Volume = Delivered Volume(6.) + Drainback (8D)  
112 gal + 4.1 gal = 116 Gallons

10. Minimum Alarm Volume = Depth of alarm (2 or 3 inches) X gallons per inch of tank(2D)  
3 in X 22.7 gal/in = 68.1 Gallons

11. Reserve Capacity Volume = [Tank Liquid Depth(2E) - Alarm Float Depth(10.)] x gallons per inch of tank(2D)  
[ 48.0 in - 24.3 in ] X 22.0 gal/in = 521.9 Gallons

Volume of Liquid in Pipe	
Pipe Diameter (inches)	Liquid Per Foot (Gallons)
1	0.045
1.25	0.078
1.5	0.110
2	0.170
3	0.380
4	0.661

DEMAND DOSE FLOAT SETTINGS Alarm and Pump are to be wired on separate circuits and inspected by the electrical inspector

12. Calculate Float Separation Distance using Dosing Volume .  
Total Dosing Volume(9.) ÷ Gallons Per Inch(2D)  
116 gal ÷ 22.0 gal/in = 5.3 inches

13. Measuring from bottom of tank:

A. Distance to set Pump Off Float = Pump + block height + 2 inches  
14 in + 2 in = 16 inches

B. Distance to set Pump On Float=Distance to Set Pump-Off Float(13A) + Float Separation Distance(12.)  
16 in + 5.3 in = 21 inches

C. Distance to set Alarm Float = Distance to set Pump-On Float(13B) + Alarm Depth (2-3 inches)(10.)  
21 in + 3.0 in = 24 inches

Inches for Dose:	<span style="border: 1px solid black; padding: 2px;">5.3</span> in	
Alarm Depth	<span style="border: 1px solid black; padding: 2px;">24.3</span> in	<span style="border: 1px solid black; padding: 2px;">521.9</span> Gal
Pump On	<span style="border: 1px solid black; padding: 2px;">21.3</span> in	<span style="border: 1px solid black; padding: 2px;">68.1</span> Gal
Pump Off	<span style="border: 1px solid black; padding: 2px;">16.0</span> in	<span style="border: 1px solid black; padding: 2px;">116</span> Gal
		<span style="border: 1px solid black; padding: 2px;">363</span> Gal

# MONITORING AND MITIGATION

## SEPTIC SYSTEM CLASSIFIED AS TYPE III

Should the system fail a new site for the septic system may be considered or the owner agrees to repair the septic system if it is possible. If the septic system is not repairable the homeowner agrees to disconnect the septic tanks from the septic system and use and maintain the septic tanks as holding tanks.

MILLE LACS BAND OF OJIBWE and ENVIRONMENTAL SYSTEMS are to be notified as soon as possible about any operational problems. If a failure occurs the septic pump must be disconnected immediately and remain disconnected until all repairs are completed. A pumping contract will need to be set up with a septic maintenance contractor. A copy of all documents must be submitted to the county.

The system must be monitored for a minimum of three years. The mound system is to be inspected by the homeowner for leaks or saturated areas. Inspections are to be done every month for 36 months. Any leaks or failures in the system must be reported to the county within 24 hours.

All expenses for repair or replacement are the homeowner's responsibility.

Type III systems are not warranted by the Inspector, Designer, or Installer

I \_\_\_\_\_ property owner of 46225 GRACE LAKE RD SANDSTONE MN.

Hereby agree that as long as I am the owner of the property, to accept all legal and financial responsibility for future system repair and/or replacement expense in the event that failure of the system on the above referenced property occurs.

---

Owner

---

Date